

TIPPING BUCKET RAINGAUGE MODEL TB3


- World standard 200mm catch
- Accuracy not affected by rainfall intensity
- Bucket sizes: 0.01 inch/ 0.2mm/ 0.5mm/ 1.0mm
- Long term stable calibration
- Stainless Steel leaf filter resists blocking
- Optional internal Data Logger, with no external power requirement
- In-built discharge outlets at base for water collection and analysis
- Dual output signal for data collection and telemetry
- World class meteorological instrument
- Easy to service with low maintenance requirement



(A)



(B)



(C)

ISO
9001

QUALITY SYSTEM
CERTIFIED



HYDROLOGICAL SERVICES PTY.LTD.
HYDROLOGICAL INSTRUMENTS & EQUIPMENT
DESIGNED AND MANUFACTURED
BY HYDROLOGISTS


Description

The Hydrological Services Tipping Bucket Raingauge is recognised as the world standard for measuring rainfall and precipitation in remote and unattended locations. The integrated syphon mechanism delivers high levels of accuracy across a broad range of rainfall intensities. Each unit consists of a collector funnel with stainless steel leaf filter, an integrated syphon control mechanism, an outer enclosure with quick release fasteners, and base which houses the tipping bucket mechanism.

The unit includes dual output reed switches with varistor protection as well as dual rainfall discharge outlets for water collection and/or analysis.

The bucket tips when precipitation of 0.01 inch, 0.2mm, 0.5mm or 1.0mm has been collected. Each tip activates a reed switch closure which is detected by a Data Logger and/or Telemetry System.

The Tipping Bucket Raingauge can be used in conjunction with Hydrological Services data logger model RRDL3. The logger is rugged and compact, it records the date and time of occurrence of tips from the raingauge up to 55,000 events can be stored in the RRDL3's memory. The data is stored in a flash EPR OM.

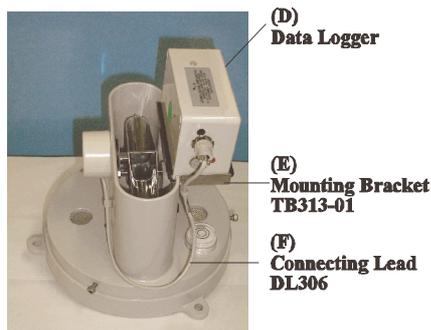

The RRDL3 fits inside the TB3 Raingauge or is housed as a freestanding data logger. The compact design of the RRDL3 makes it ideal for incorporation into any piece of equipment where intelligent data acquisition and logging are required.

Accessories

<u>Description</u>	<u>Part No.</u>
(A) Field Calibration Device	FCD
(B) TB3 Bird Guard	TB333
(C) TB3 Pole Mounting Bracket	TB334
(D) Data Logger	RRDL3/RRDL3AN
(E) Mounting Bracket	TB313-01
(F) Connecting Lead	DL306

Specifications

Receiver:	200 mm \pm 0.3 diameter machined aluminium rim. Powder coated.
Bucket capacity:	0.2 mm, 0.5 mm, 1.0 mm, 0.01 inch of rainfall.
Sensitivity:	one tip.
Measuring range:	0 to 700 mm / hr.
Calibration accuracy:	\pm 2 % for intensities from 25 to 500 mm/hr. Long term stable calibration.
Humidity:	0 to 100 %
Temperature:	- 20 to +70°C
Contact system:	dual reed switches potted in soft silicon rubber with varistor protection.
- Max Capacity:	12 VA (0.5 amp max.)
- Resistance:	Initial contact resistance 0.1 OHMS
- M.T.B.F.:	10 ⁸ to 10 ⁹ Operations
Syphon:	0.4 mm capacity of rainfall - made from brass with a non hydroscopic outer body.
Bucket:	chrome plated, injection moulded non hydroscopic ABS balanced \pm 0.05 gms.
Base:	diecast aluminium.
Level:	bulls eye level adhered to aluminium base.
Mounting holes:	three 10 mm diameter mounting holes with 117 mm p.c.d. cast in feet attached to outside diameter of base.
Drain fittings:	able to attach 12 mm inside diameter tubing, to catch rainfall after passing through buckets.
Pivots:	ground sapphire pivots with hard stainless steel shaft.
Insect covers:	stainless steel mesh on all openings to prevent insects and ants entering gauge.
Outer enclosure:	keyed to enable the release of the outer enclosure without the need for the removal of the three securing screws.
Height:	342mm (13.5"); Weight: 3 kg (6.6 lbs)
Packed Dimensions:	4.2 Kg, 0.03m ³ (9.3 lbs, 1.1ft ³)
Note: Specifications are subject to change at anytime	

HYDROLOGICAL SERVICES PTY. LTD.

48-50 SCRIVENER STREET, WARWICK FARM, 2170 SYDNEY, AUSTRALIA.
A.B.N. 37 000 732 954
PO Box 332 Liverpool BC 1871
PH: 02 96012022 (INT.612 9601 2022)
FAX: 02 9602 6971 (INT.612 9602 6971)
Email: sales@hydrologicalservices.com
Website: www.hydrologicalservices.com

Distributed by